



Quality is in our soul



ZD4525(NTAG)

This tag is designed on wave-absorbing material. solving the problem that tag can't work on the metal surface and Anti tampering.

Product Property: Optional of Tamper proof, Brittle antenna, Destructive aluminum etching.

Material

Antenna	Aluminum
Face material	Coated Paper
	Absorbing material

Tag parameters(mm)

Antenna size	40*19mm±0.2mm
Label size	40*25mm±0.2mm
Label thickness	0.35±0.05mm

Product configuration(mm)

Label Corner Radius	R=2±0.50
Label Pitch	29.4±0.50
Label Gap	4.4±0.50
Liner Width	50±1, available on request

Reel

Qty/reel	2000pcs
Core ID	76.2±0.50 (3")


RF parameters

IC	NTAG213/NTAG424DNA etc.
Operating frequency	13.56MHz
Protocol	ISO14443A
Memory	NTG213(180 byte) NTAG424DNA(416 Bytes)
Feature	Anti-metal Anti-tampering Anti-counterfeit
Final inspection	100%
Dead tag marking	Black dot, 5mm
Tag customization	Available on request
Tag encoding	Available on request
Reading distance	0.5~5cm


**Genuine IC
GUARANTEED**

ICs sourced directly from their manufacturer or authorised representative.

ANTENNA DESIGN

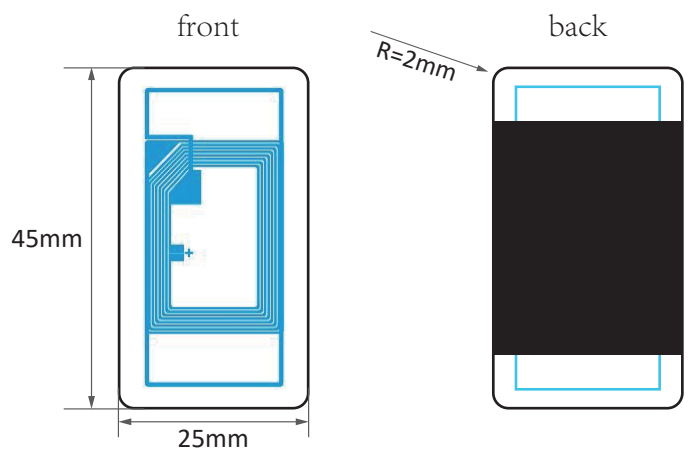

ROLL DESIGN

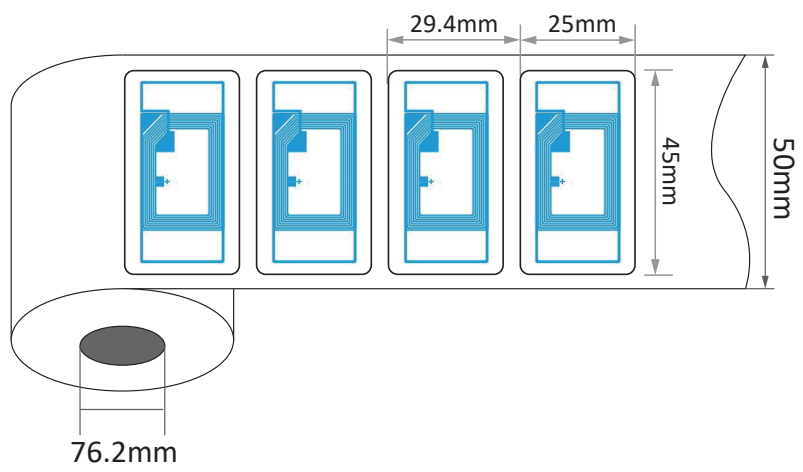

TAG STRUCTURE

